

PROSCEND®

5600N Series 2BASE-TL EFM Network Extender

Description

Proscend 5600N Series EFM Network Extender is designed to provide bonded high-speed Ethernet First Mile services over SHDSL on existing copper infrastructure. It is a bridge mode modem that delivers Ethernet services with symmetrical bandwidth at rates up to 15.3 Mbps/Pair (TC-PAM 128). Implemented based on IEEE 802.3ah EFM standards for advanced performance and management features, **5600N** Series ensures high reliability, low expense and maximum throughput. The introduction of EFM copper bonding technology allows delivery of higher bandwidth to longer distances over multiple copper pairs, enabling a good alternative in place where fiber is not economical to deploy. This "Ethernet-pure" solution provides a seamless integration into today and tomorrow's networks.

Proscend 5600N Series extends the reach of Ethernet services to the sites by using bonded copper pairs. Up to 4 pairs can be bonded together for aggregated bandwidth over 61Mbps (TC-PAM 128). Designed with standard-based EFM technology (2BASE-TL), deployment of Ethernet services with **5600N** is quick and simple on the existing copper plant. It operates mainly in Point-to-Point connection between remote offices and enterprise headquarter, providing symmetrical high-speed connectivity that is ideal for large and small-to-medium enterprises to deliver business-class Ethernet service.


With **Proscend 5600N** Series, network performance is significantly enhanced by eliminating unnecessary conversion of packet formats when transiting between Ethernet (LAN) and legacy ATM network (WAN). User-friendly Ethernet also make it possible to save unnecessary truck roll costs and training costs. It leads to minimized risk bearing and quick return on investment for both service providers and enterprises.

Proscend 5600N Series operates the SHDSL link in either EFM mode or ATM mode. It is designed to deliver business class Ethernet Service under EFM mode while providing the flexibility to be compatible with the existing DSLAM infrastructure under ATM mode. The unit can be managed by different ports and applications including comprehensive command-line interface (CLI), Telnet, user-friendly GUI-based Web Browser Interface and SNMP.


Proscend 5600N Series provides future-proof features meeting Ethernet Quality of Service (QoS) and Class of Service (CoS) requirements by utilizing 802.1q VLAN capabilities, four levels of priorities, traffic flow control and rate control. This traffic management and QoS features enable service providers to offer highly profitable value-added services to a vast majority of business and institutional sites.



Back-to-Back Connectivity

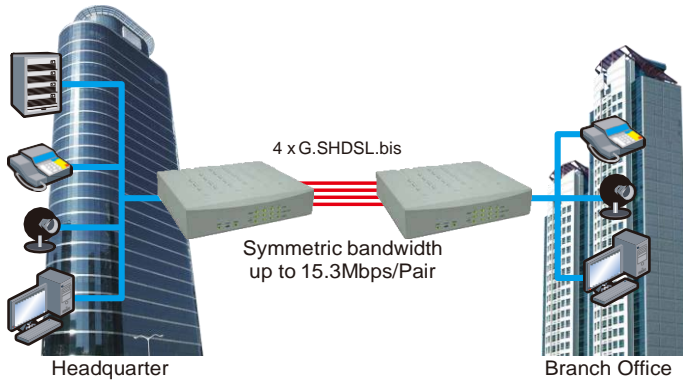

Connection to IP DSLAM

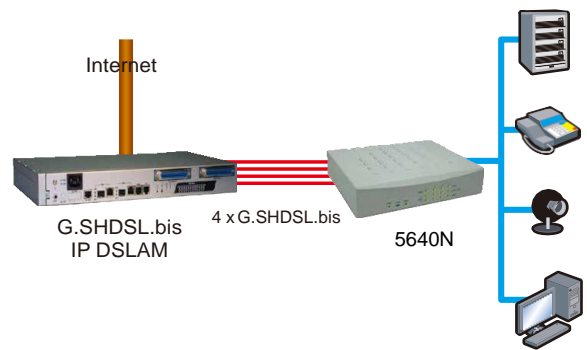

Features

- Extending Ethernet Services to sites with existing copper infrastructure
- EFM Bonding up to 61 Mbps (4 pairs, TC-PAM 128)
- Support both EFM mode and ATM mode
- Flexible and Rapid Service Deployment
- Flexible configuration as CPE or CO
- Support EFM OAM complying IEEE 802.3ah
- Low Delay, Jitter and Packet Loss for delay sensitive applications
- Comprehensive and easy OAM & P functions in provisioning and management
- QoS feature for guaranteed Ethernet service
- Future-proof Ethernet traffic management and QoS features

Applications

- Metro Ethernet Extension
- Fast Internet Access
- Point to Point Connectivity
- Transparent LAN Services
- Leased Lines Replacement
- Mobile Backhaul

Specification

5600N Series 2BASE-TL EFM Network Extender

Network Interface

LAN

- 4-port switching hub
- 10/100BASE-T auto-negotiation & sensing
- Auto MDI/MDI-X

WAN

- ITU-T G.991.2.(2004)
- 2BASE-TL
- EFM bonding (IEEE 802.3ah PAF)
- Data Rate:
 - N x 64 Kbps (N=3~89) using TC-PAM 16/32
 - Max. 5.696Mbps (1-Pair)
 - Max. 11.392Mbps (2-Pair)
 - Max. 22.784Mbps (4-Pair)
 - N x 64 Kbps (N=3~239) using TC-PAM 64/128
 - Max. 15.296 Mbps (1-Pair)
 - Max. 30.592 Mbps (2-Pair)
 - Max. 61.184 Mbps (4-Pair)
- Support of Annex A , Annex B , Annex AF & Annex BG
- Support TC-PAM 16/32/64/128
- Impedance: 135 ohms

LAN Protocols

- 802.1d Transparent Bridging
- Up to 2K MAC Address learning bridge

Hardware Interface

- WAN(DSL) : RJ-45 x 1
- LAN : RJ45 x 4

- Management Port: RJ45 x 1
- Console Port: RJ45 x 1
- Reset Button: Load Factory Default
- DC Power Jack x 1

Indicator

- LAN: Link/Act, 10/100 per port
- WAN: Link per loop
- System: Power, Alarm, MGMT

Management Interface

- Easy to use web-based GUI for quick setup, configuration and management
- Menu-driven interface/Command line interface (CLI) for local console and telnet access
- Password protected management and access control list for administration
- SNMP v1/v2 (RFC1157/1901/1905) agent and MIB II (RFC1213/1493)
- EFM OAM (IEEE 802.3ah)
- Software upgrade via web-browser/TFTP

ATM Mode

- Framing ATM, 64B/65B
- 1 PVC
- AAL5
- VC multiplexing and SNAP/LLC
- Ethernet over ATM (RFC 2684/1483)

VLAN Support

- IEEE 802.1q VLAN Tagging
- Port Based VLAN
- Up to 8 802.1q VLANs (ID Range1~4094)
- VLAN Stacking (Q-in-Q)

QoS Support

- Rate limiting by rule-based/port-based
- Traffic classification based on port/802.1p/DSCP
- WRR (Weighted Round Robin)/SPQ (Strict Priority Queuing) scheduling algorithm

Environment

- Operating Temperature: -20°C ~ +40°C
- Storage Temperature: -20°C ~ +85°C
- Relative Humidity: 98%, non-condensing

Regulatory

- ISO 9001 Quality Management
- CE Approval & EN60950 Certificate
- FCC Part 15 Subpart B

Physical / Electrical

- Dimension (mm): 195 x 48 x 168
- AC Power Adapter (100~240VAC with 50~60Hz)
- Weight: 5610N: 1300g, 5620N: 1320g, 5640N: 1340g

Memory

- 2MB Flash Memory, 16MB SDRAM

Order Information

5610N	5620N	5640N
1-pair 2BASE-TL EFM Network Extender	2-pair 2BASE-TL EFM Network Extender	4-pair 2BASE-TL EFM Network Extender
5.7 Mbps TC-PAM 32, 15.3 Mbps TC-PAM 128	11.4 Mbps TC-PAM 32, 30.6 Mbps TC-PAM 128	22.8 Mbps TC-PAM 32, 61.2 Mbps TC-PAM 128

Proscend reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. All rights reserved.

PROSCEND
Proscend Communications Inc.

2F, No.36, Industry East Road IV, Hsinchu Science Park, Hsinchu, Taiwan. 300 Tel: +886-3-5639000 Fax: +886-3-5633830 Email: sales@proscend.com

www.proscend.com